

TYPE: GMV-F-C-B10

MACHINED VERSION

SWIVEL FEMALE NUT, BSP THREAD, 60° CONE SEALING

TYPE

- Swivel female nut
- BSP thread
- 60° cone sealing
- Machined version

STANDARD


- ISO 10806:2003
- ISO 228-1:2000
- DIN 475

MATERIAL

- SS AISI 316L (w.nr. 1.4404)

OTHER SPECIFICATION

- Material certificate acc. EN 10204:2004 type 3.1

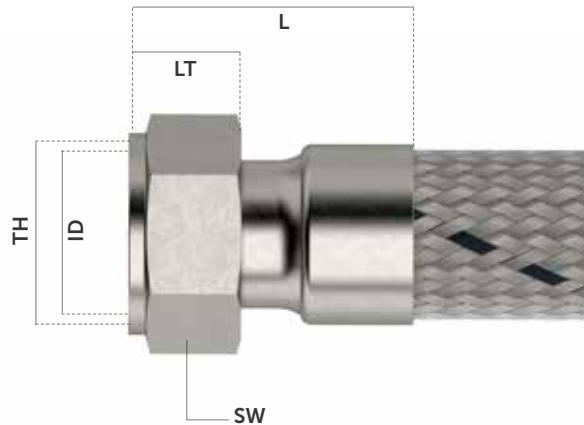

TYPE: GMV-F-C-B10

Code	For hose ID		L		TH	LT		ID		SW	
	NB	inch	mm	inch		mm	inch	mm	inch	mm	inch
GMV-F-C-B10-1/4"	DN06	1/4"	35.2	1.386	1/4" BSP	8.00	0.31	4.50	0.18	19.0	0.75
GMV-F-C-B10-3/8"	DN10	3/8"	43.0	1.693	3/8" BSP	11.0	0.43	9.00	0.35	22.0	0.87
GMV-F-C-B10-1/2"	DN12	1/2"	49.5	1.949	1/2" BSP	12.5	0.49	12.5	0.49	27.0	1.06
GMV-F-C-B10-3/4"	DN20	3/4"	56.4	2.220	3/4" BSP	16.5	0.65	16.5	0.65	32.0	1.26
GMV-F-C-B10-1"	DN25	1"	59.5	2.343	1" BSP	19.5	0.77	21.5	0.85	41.0	1.61
GMV-F-C-B10-1 1/4"	DN32	1.1/4"	70.0	2.756	1" 1/4 BSP	21.5	0.85	29.5	1.16	50.0	1.97
GMV-F-C-B10-1 1/2"	DN40	1.1/2"	77.8	3.063	1" 1/2 BSP	26.0	1.02	33.5	1.32	55.0	2.17
GMV-F-C-B10-2"	DN50	2"	87.9	3.461	2" BSP	32.5	1.28	43.5	1.71	70.0	2.76